



DL

DUŠILNA LOPUTA THROTTLING DAMPER

OPIS:

Dušilne lopute se uporabljajo za nastavitev količin pretoka zraka v kanalih.

KONSTRUKCIJA:

- ohišje
- lamela
- ročna ali elektromotorna nastavitev lamel

MATERIAL: pocinkana pločevina

DIMENZIJE:

STANDARDNE DIMENZIJE:

A=100, 150, 200, 250, 300, 400, 500, 600 mm,
H=100, 150, 200, 250, 300 mm;
L=200 do dim 200x200; L=300 nad dim 200x200

Na željo kupca je možno izdelati tudi ostale nestandardne dimenzije

DESCRIPTION:

The throttling volume control damper is used to regulate the volume of air flow in the ducts.

CONSTRUCTION:

- casing
- blade
- manual or electromotor control mechanism


MATERIAL: galvanized sheet

DIMENSIONS:

STANDARD DIMENSIONS:

A=100, 150, 200, 250, 300, 400, 500, 600 mm,
H=100, 150, 200, 250, 300 mm;
L=200 up to dim 200x200; L=300 above dim 200x200

Other non-standard dimensions can be produced upon customer request

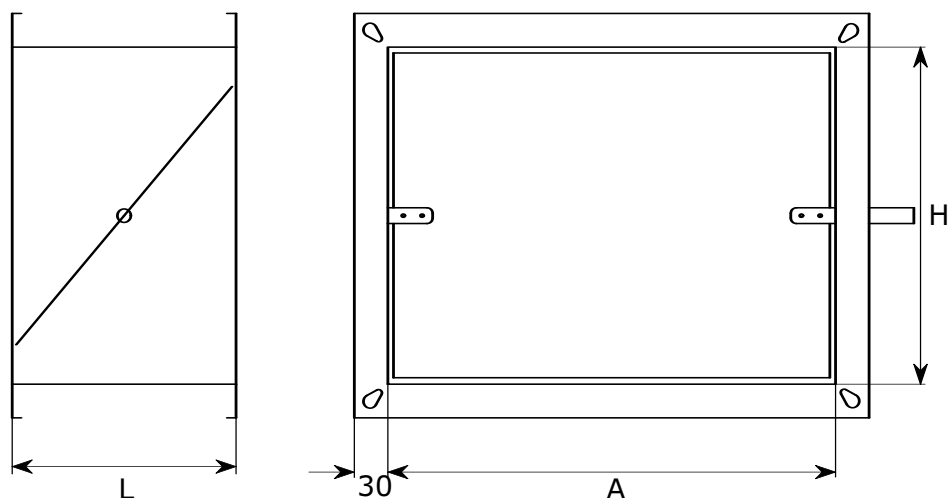

DODATKI:

- BELIMO elektro motor:
 - LM24A
 - NM24A
 - LM24A SR
 - NM24A SR
 - LM230A
 - NM230A
 - LM230A SR
 - NM230A SR

SUPPLEMENTS:

- BELIMO electric drive:
 - LM24A
 - NM24A
 - LM24A SR
 - NM24A SR
 - LM230A
 - NM230A
 - LM230A SR
 - NM230A SR

NAČIN NAROČANJA / HOW TO ORDER:

DL	300	x	200	E + LM24A
				pogon / drive R - centralni ročni pogon / central manual drive E - pripravljeno za elektromotorni pogon / ready for electromotor drive E + BELIMO... - montiran elektromotorni pogon / mounted electromotor drive višina H / height H standard 100, 150, 200, 250, 300 poljubna / optional širina A / width A standard 100, 150, 200, 250, 300, 400, 500, 600 poljubna / optional tip lopute / type of damper