



SP-R

OKROGLI STOLPNI PREZRAČEVALNIK ROUND AIR TOWER

OPIS:

Okrogli stolpni prezračevalnik se uporablja za dovod in odvod zraka.

KONSTRUKCIJA: stolpni prezračevalnik je sestavljen iz cevastega ohišja, lamel in zaključne kape, ki je lahko ravna, koničasta ali poševna.

MATERIAL:

- ZN - pocinkana pločevina + RAL barva
- INOX nerjaveča pločevina

MONTAŽA: s prirobnico na betonsko podlago ali opcija - z vijaki direktno na priključno odprtino prezračevalne cevi

DESCRIPTION:

The round air tower is used for the supply of fresh air or for the exhaust of outlet air.

CONSTRUCTION: air tower consists of a casing, blades and a cap. Cap is available in three forms: flat, pointed or diagonal.


MATERIAL:

- Zn - galvanized sheet metal + RAL colour
- INOX stainless steel sheet metal

INSTALLATION: with flange on concrete base or option - with screws directly to the ventilation pipe connection opening.


DIMENZIJE / DIMENSIONS:

Ø D	160	200	250	315	350	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	
H5	132	155	184	239	260	288	364	422	480	555	613	689	747	804	880	938	996	1053	
H4	52	58	64	91	96	103	134	147	161	192	206	237	250	264	295	309	322	335	
H3	31			49			67			85			103			121			
H2	21			39			57			75			93			111			
H1	poljubno / optional																		

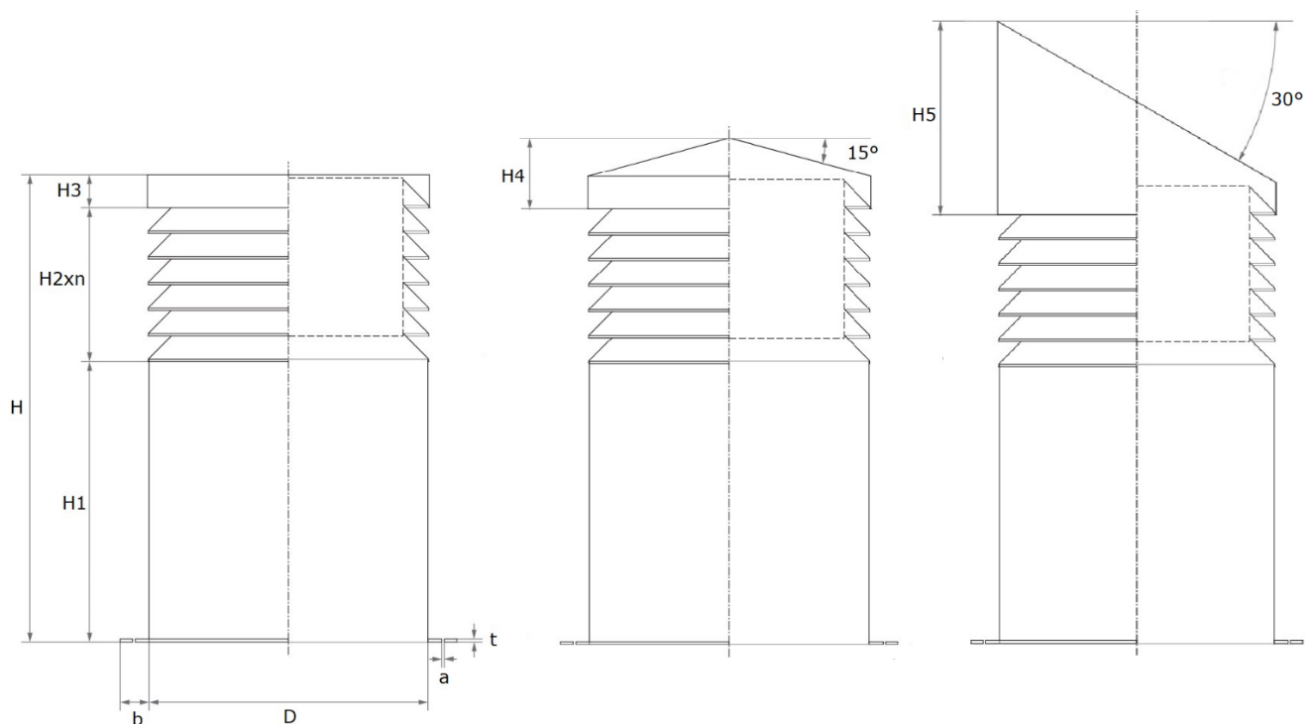


MONTAŽA S PRIROBNICO / INSTALLATION WITH FLANGE


Ø D (mm)	Ø B (mm)	a x b (mm)	Vijaki Bolts		Prirobnica Flange
			kos/pcs	dim	d x t (mm)
160	205	7 x 12	6	M6	35 x 3
200	245				
250	295				
315	360				
350	395				
400	445				
500	555	9,5 x 14,5	12	M8	45 x 4
600	655				
700	755				
800	855				
900	955				
1000	1060	11,5 x 16,5	24	M10	50 x 5
1100	1160				50 x 6
1200	1260				
1300	1360				
1400	1460				
1500	1560				
1600	1660				

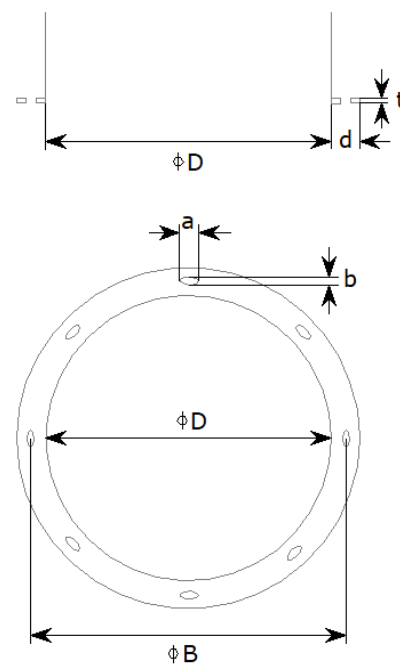**MONTAŽA NA CEV BREZ PRIROBNICE
INSTALLATION ON PIPE WITHOUT FLANGE**


SP-R se standardno dobavi s prirobnico. Do dim D=315 mm se lahko na željo kupca izdelava brez prirobnice. Prezračevalnik, nasadimo na prezračevalno cev in pritrdimo z vsaj 3 vijaki.

The SP-R is supplied with a flange as standard. Up to D=315 mm it can be manufactured without a flange per customer's request. The air tower is placed on the ventilation pipe and fixed with at least 3 screws.

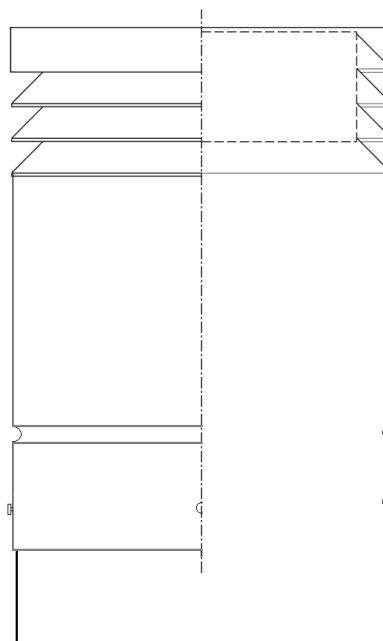


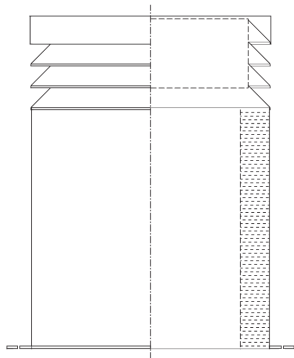DODATKI / SUPPLEMENTS:


50 ali 100 mm zvočno in proti kondenzacijsko izolirana cev
50 or 100 mm acoustically and condensation-proof insulated tube

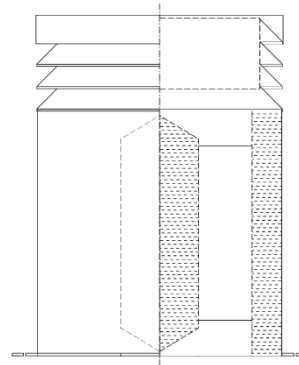


Okroglo dušilno jedro $D \geq 600$ mm
Round sound attenuating core $D \geq 600$ mm

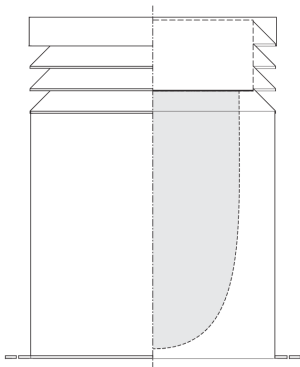


Snemljiva kapa in vrečasti filter $D=160-500$ mm
Removable cap and filter bag for dimensions $D=160-500$ mm

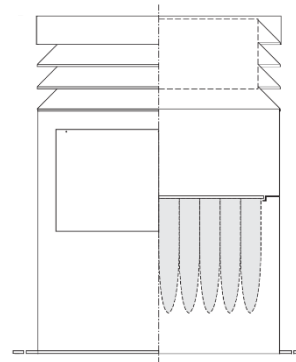

Revizijska vrata in vrečasti filter $D=600-1600$ mm
Revision door and filter bag $D=600-1600$ mm

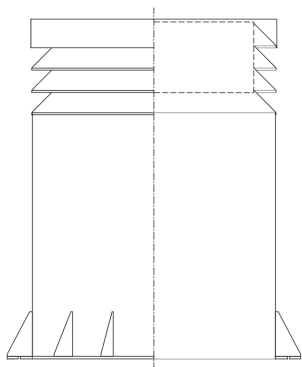

Pri $H > 4000$ mm priporočamo prirobnico širine 100mm in trikotne ojačitve za večjo stabilnost
At $H > 4000$ mm we recommend 100mm wide flange and triangular reinforcements for increased stability.

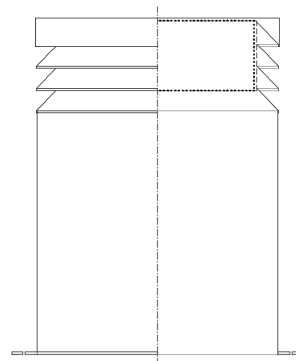

Mreža proti insektom z odprtinami $2,5 \times 2,5$ mm.
 $D \leq 500$ mm skupaj s snemljivo kapo, $D \geq 600$ skupaj z revizijskimi vrati, ki omogoča čiščenje mreže.
Insect net with $2,5 \times 2,5$ mm large holes. $D \leq 500$ mm with removable cap, $D \geq 600$ with revision door to allow cleaning of the net.

TEHNIČNI PODATKI / TECHNICAL DATA:

Tehnični podatki se preračunajo za vsako dimenzijo posebej preko izbornega programa dostopnega na:
The technical data is calculated for each dimension separately using the selection software available at:

<https://izdelki.kosanc.si>

NAČIN NAROČANJA / HOW TO ORDER:

SP-R	400	H=800	N=5	ZN	RAL 9010M	ISO 50	1200 m³/h		dovod
									smer zraka air direction dovod ali odvod inlet or outlet montaža / installation 0 - s prirobnico (standard) with flange (standard) CEV - na cev / on pipe količina zraka / air volume dodatki / supplements ISO 50 - izoliran plašč 50 mm / insulated casing 50 mm ISO100 - izoliran plašč 100 mm / insulated casing 100 mm DJ - dušilno jedro / sound attenuating core F1 - filter vreča / filter bag IM - mreža proti mrčesu / insect net TO - trikotne ojačitve / triangular reinforcements RV - revizijska vrata / revision door barva / colour material ZN, INOX 304, INOX 316 število lamel / number of blades višina H / height H poljubna / optional dimenzija / dimension standard: 160, 200, 250, 315, 350, 400, 500, 600, 800, 1000, 1200, 1300, 1400, 1500, 1600 poljubna / optional tip stolpnega prezračevalnika / type of air tower