



# RS

## STREŠNI PODSTAVEK ROOF SOCKET

### KONSTRUKCIJA:

- kvadratno ohišje z izbiro dveh višin
- termična in akustična izolacija z notranje strani z mineralno volno debeline 50 mm. Izpostavljeni del izolacije je zaščiten s prevleko iz črnega steklenega voala.
- **RS-R** dodana kvadratna plošča za pritrditev podstavka na ravno streho
- **RS-P** dodani profili za pritrditev podstavka na poševno streho
- **RS-R-K** dodane dušilne kulise in kvadratna plošča za pritrditev podstavka na ravno streho
- **RS-P-K** dodane dušilne kulise in profili za pritrditev podstavka na poševno streho

### MATERIAL:

- ZN - pocinkana pločevina
- AL - aluminijasta pločevina

### DODATKI:

- PP - perforirana pločevina preko mineralne volne kot ognjevarna zaščita do temperature 600 °C
- PL - plošča za pritrditev lopute
- SL - samodvižna loputa

### CONSTRUCTION:

- square casing with a choice of two heights
- thermal and acoustic insulation on the inner side with 50 mm mineral wool. Exposed surface of mineral wool is protected with black glass voile cover.
- **RS-R** added square plate for fixing the roof socket to the flat roof
- **RS-P** added mounting profiles for fixing the roof socket to the inclined roof
- **RS-K-R** added acoustic panels and a square plate for fixing the base to the flat roof
- **RS-K-P** added acoustic panels and mounting profiles for fixing the roof socket to the inclined roof

### MATERIAL:

- ZN - galvanized sheet metal
- AL - aluminium sheet metal

### SUPPLEMENTS:



- PP - perforated sheet over mineral wool as fire protection up to 600 °C
- PL - plate for damper installation
- SL - self-closing damper

### DIMENZIJE / DIMENSIONS


| dim         | A    | B   | C    | E   | H   |      | K    |
|-------------|------|-----|------|-----|-----|------|------|
| <b>290</b>  | 290  | 188 | 470  | 245 | 300 | 750  | 500  |
| <b>395</b>  | 395  | 293 | 600  | 330 | 300 | 750  | 600  |
| <b>545</b>  | 545  | 443 | 725  | 450 | 300 | 750  | 750  |
| <b>615</b>  | 615  | 513 | 795  | 535 | 300 | 750  | 820  |
| <b>695</b>  | 695  | 593 | 875  | 590 | 300 | 1000 | 900  |
| <b>885</b>  | 885  | 783 | 1065 | 750 | 300 | 1000 | 1100 |
| <b>1080</b> | 1080 | 978 | 1260 | 840 | 300 | 1000 | 1300 |

Vse dimenzije se lahko prilagodijo potrebam kupca / All dimensions can be adjusted to the customer's needs


1. izolirano ohišje 50 mm  
isolated casing 50 mm
2. dušilna kulisa  
acoustic panel
3. plošča za ravno streho  
plate for flat roof
4. profili za pritrditev podstavka na poševno streho  
mounting profile socket for inclined roofs
5. OPCIJA - perforirana pločevina za ognjevarno zaščito  
OPTION - perforated plate for burn prevention

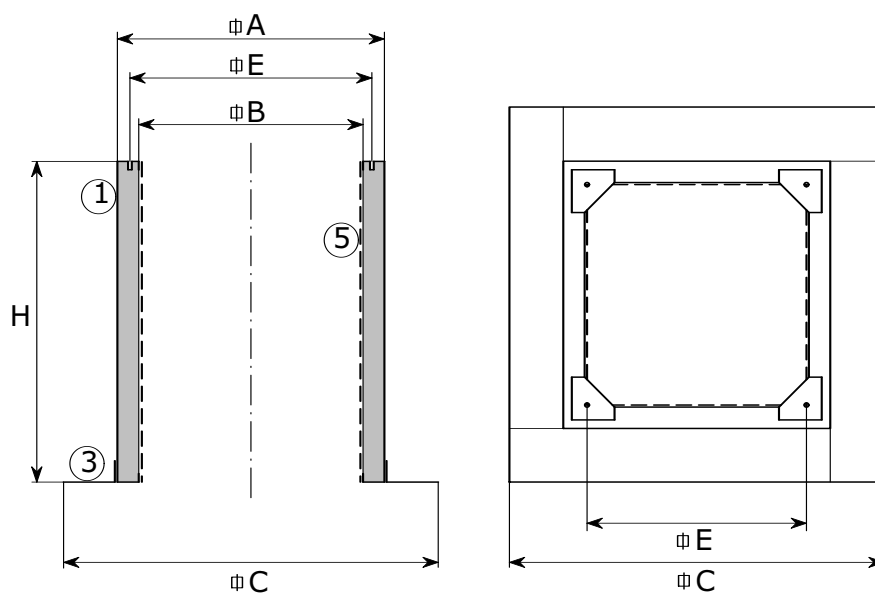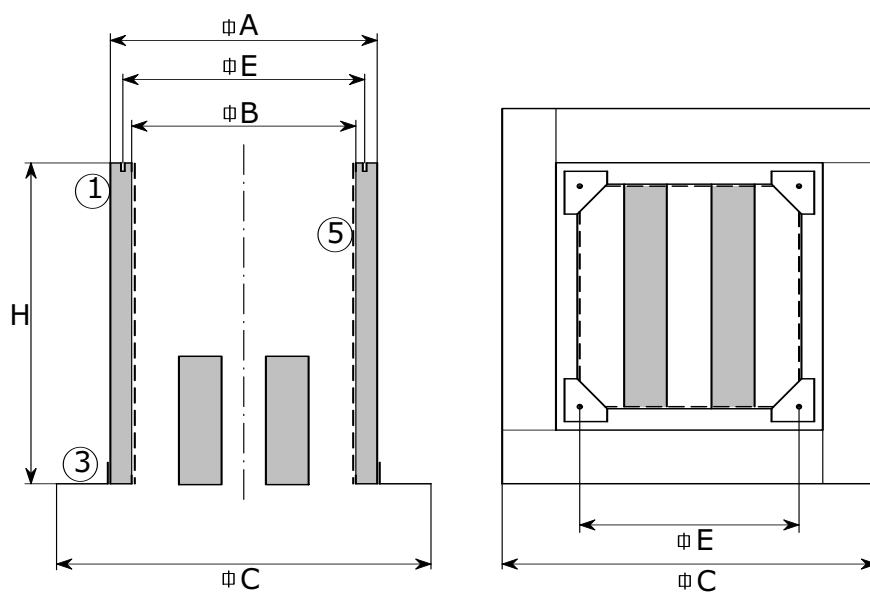**RS-R****RS-R-K**

## RS-P

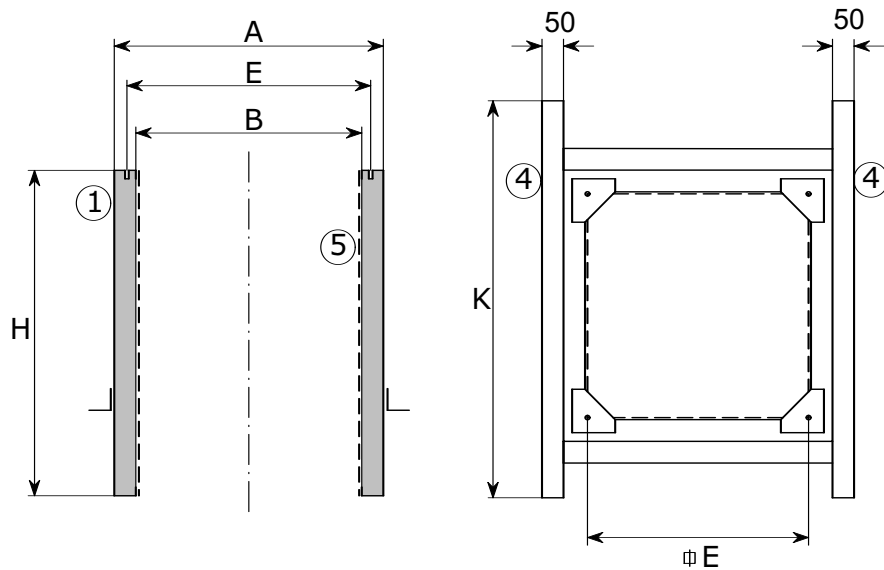

## RS-P-K

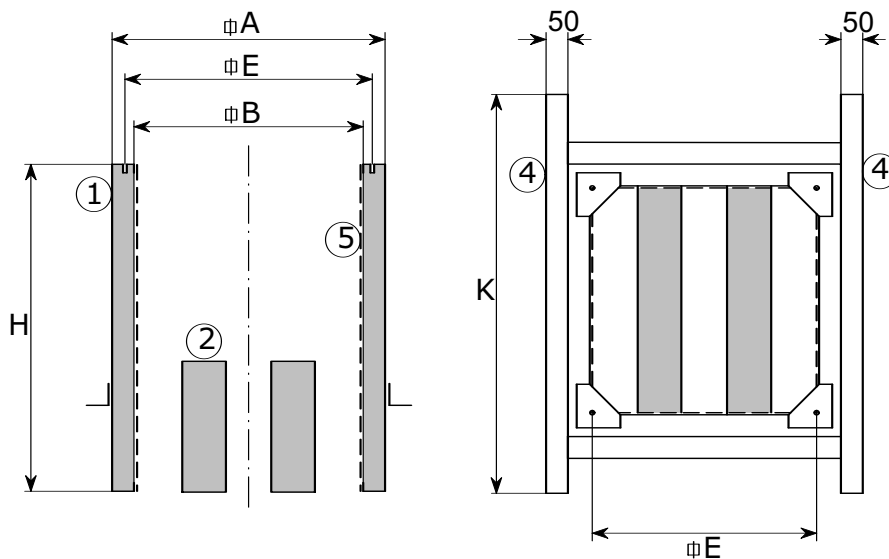

## NAČIN NAROČANJA / HOW TO ORDER:

| RS-R | 615 | / | 750                                                                           | ZN | PP |
|------|-----|---|-------------------------------------------------------------------------------|----|----|
|      |     |   | <b>dodatki / supplements</b>                                                  |    |    |
|      |     |   | PP - perforirana pločevina preko izolacije / perforated sheet over insulation |    |    |
|      |     |   | PL - plošča za pritrditev lopute / plate for damper mounting                  |    |    |
|      |     |   | SL - samodvižna loputa / self-closing damper                                  |    |    |
|      |     |   | <b>material</b>                                                               |    |    |
|      |     |   | ZN, AL                                                                        |    |    |
|      |     |   | <b>višina / height</b>                                                        |    |    |
|      |     |   | standard<br>poljubna / optional                                               |    |    |
|      |     |   | <b>dimenzija / dimension</b>                                                  |    |    |
|      |     |   | standard 290, 395, 545, 615, 695, 885, 1080<br>poljubna / optional            |    |    |
|      |     |   | <b>tip / type</b>                                                             |    |    |
|      |     |   | RS-R                                                                          |    |    |
|      |     |   | RS-P                                                                          |    |    |
|      |     |   | RS-R-K                                                                        |    |    |
|      |     |   | RS-P-K                                                                        |    |    |