



VD-5

VRTINČNI DIFUZOR SWIRL DIFFUSER

OPIS:

Vrtinčni difuzor VD-5 je namenjen prezračevanju nizkih prostorov višine od 2,6 do 4 m. Primeren je za vgradnjo v spuščene stropе.

KONSTRUKCIJA:

- kvadraten ali okrogel difuzor
- fiksne lamele
- okrogla razporeditev lamel
- usmerjevalni obroč

MATERIAL:

- STANDARD: pocinkana pločevina Magnelis
- OPCIJA:
 - nerjaveča pločevina INOX AISI 304 SB
 - nerjaveča pločevina INOX AISI 304 SIJAJ
 - nerjaveča pločevina INOX AISI 316 SB

BARVA: bela barva RAL 9010 MAT ali poljubna barva po RAL lestvici

MONTAŽA: pritrditev z enim centralnim ali štirimi stranskimi vijaki na komoro tipa PB-2

DESCRIPTION:

The VD-5 swirl diffuser can be used for various ceiling heights from 2.6 m to 4 m. It is suitable for installation in dropped ceilings.

CONSTRUCTION:

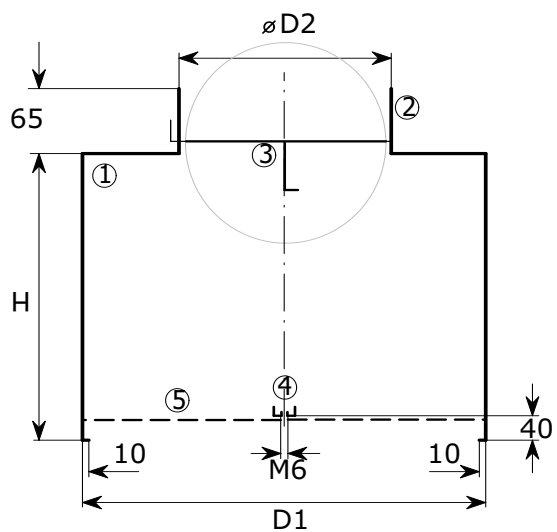
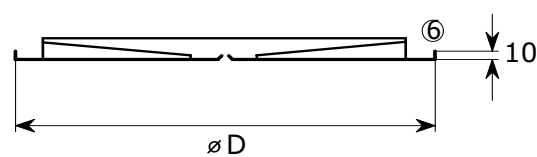
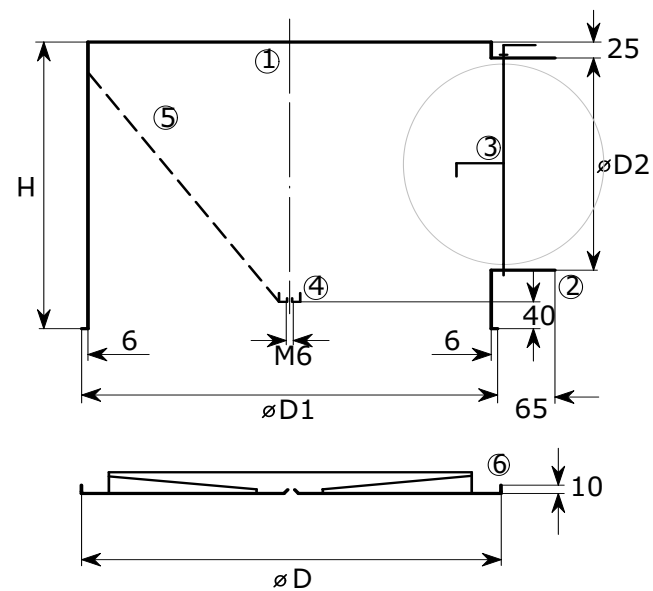
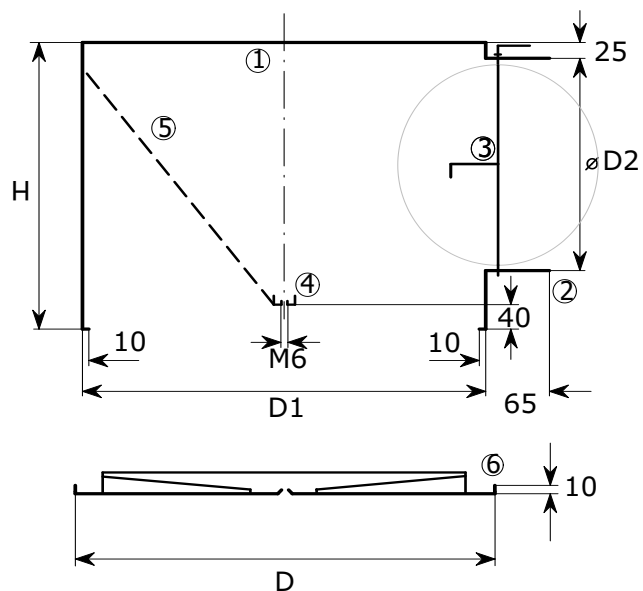
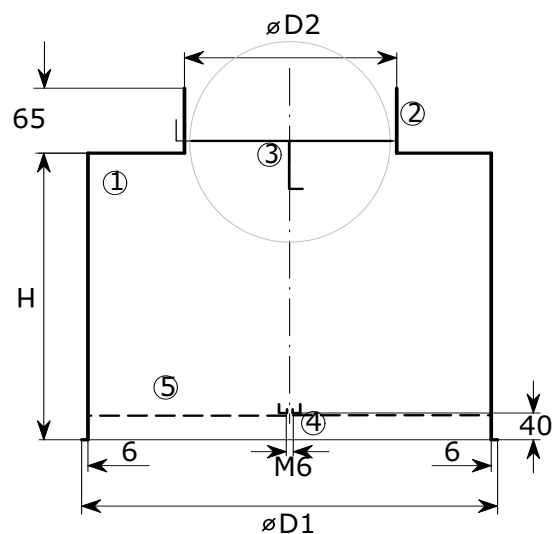
- square or round diffuser
- fixed blades
- radial blade arrangement
- guidance ring

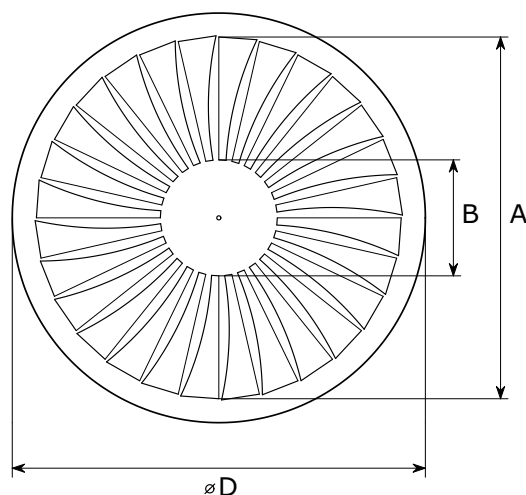
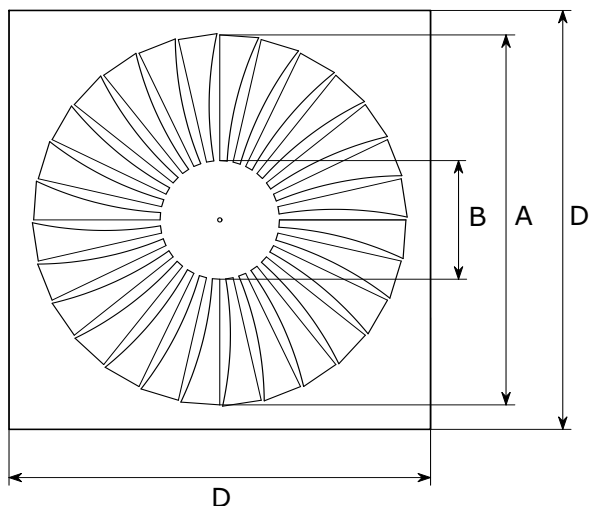
MATERIAL:

- STANDARD: galvanized sheet metal - Magnelis
- OPTION:
 - stainless steel sheet metal INOX AISI 304 SB
 - stainless steel sheet metal INOX AISI 304 GLOSS
 - stainless steel sheet metal INOX AISI 316 SB

FINISH: RAL 9010 MAT white, or any colour from the RAL palette

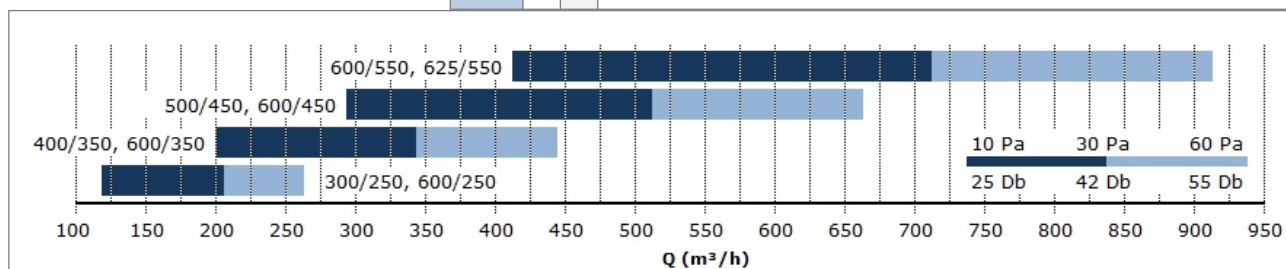
INSTALLATION: with one central screw on the plenum box PB-2

DIMENZIJE / DIMENSIONS:**K** - kvadratna / square**R** - okrogla / round



- .. komora PB-2
- plenum PB-2
- !. okrogla priključna odprtina
- round connection opening
- !. regulacijska loputka
- volume control damper
- !. prečka
- traverse
- !. perforirana razpršilna plošča
- perforated dispersing plate
- !. difuzor
- diffuser

HITRA IZBIRA / FAST SELECTION:

[illegible]

NAČIN NAROČANJA / HOW TO ORDER:

VD-5	K	600	/	550	RAL 9010 MAT	PB-2	PP	600	/	200	H	ISO 6mm
												izolacija / insulation 6 mm, 10 mm, 19 mm pozicija priključka position of connection H – horizontalen / horizontal V – vertikalni / vertical priključek / connection opening standard 200, 250 poljuben / optional dimenzija komore / plenum dimension perforirana razpršilna plošča / dispersing plate komora / plenum PB2 komora / plenum material in barva / material and colour Standard: ZN + RAL 9010 MAT Options: INOX 304 SB INOX 304 gloss INOX 316 SB velikost lamelnega dela / dimension of blade area 250,350,450,550 dimenzija difuzorja / diffuser dimension 300, 400, 500, 600, 625 oblika / shape K - kvadratna / square R - okrogla / round tip difuzorja / diffuser type